


MODULE KIDZ X30mm and X40mm



FIELDS, OUTDOOR PLAYGROUNDS

Comfort and safety for children

- Impact absorption
- Water permeable (dries quickly without puddling)
- Anti-slip and noise reduction properties

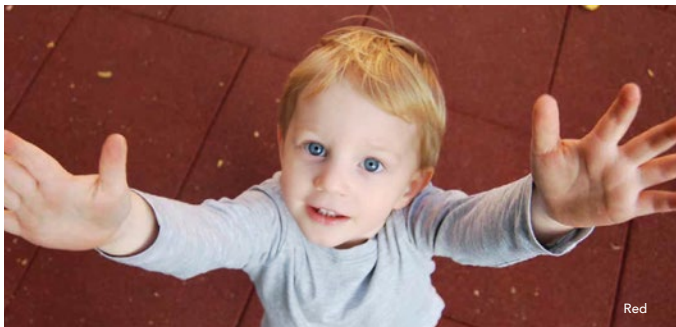


>80% RECYCLED
100% RECYCLABLE

YOUR OLD TYRES CAN BE TRANSFORMED INTO FLOORING!

fall height [m] / thickness [mm].

Complies with standard EN 1177, impact absorption playground floors.

All thicknesses are available upon request to meet all needs, environments and applications.

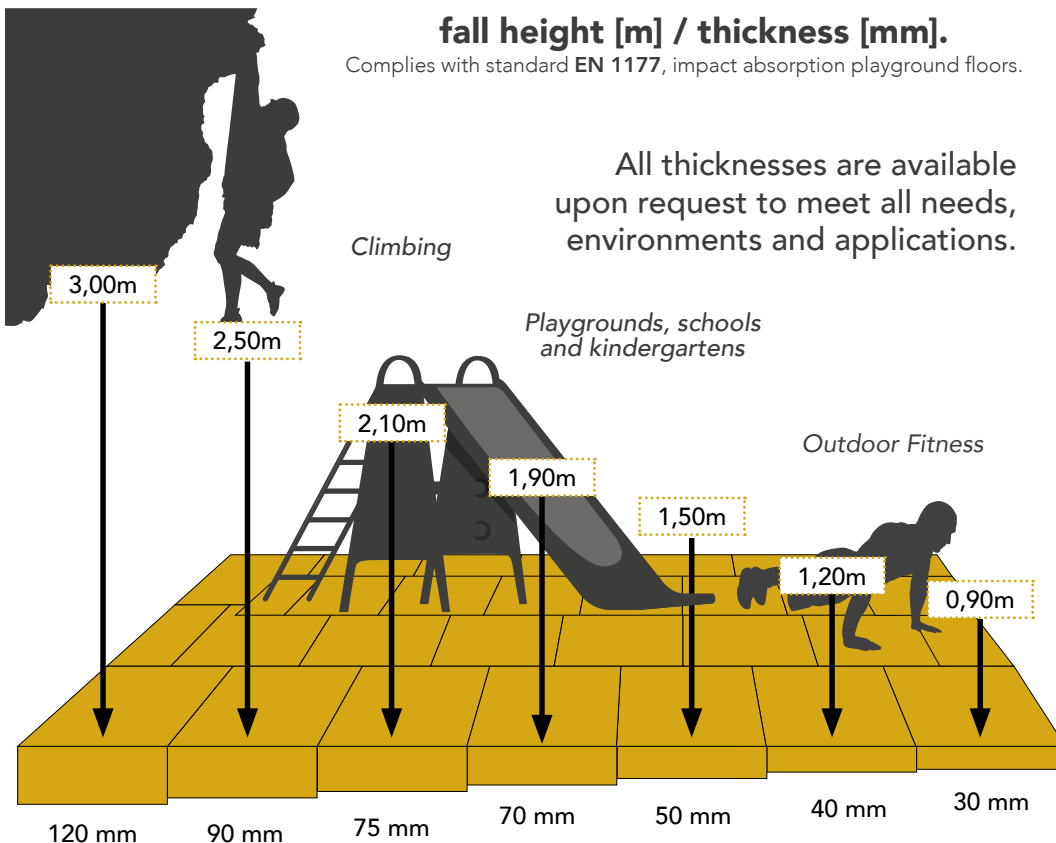

THERMAL INSULATION



ANTI-SLIP PROPERTIES



QUICK AND EASY TO INSTALL



UV-RESISTANT



ACOUSTIC INSULATION






Red and green



Red and green

Description	Norms	Module Kidz X30	Module Kidz X40
Thickness	EN 4282	30mm	40mm
Thickness tolerance		+/- 2mm	
Dimensions (mm)	EN 426	500 x 500 (also available in 503x1006mm)	
Article code		MKID30	MKID40
Fall height	EN 1177	100 cm	120 cm
Weight / tile	EN 430	21kg /m ²	26kg /m ²
Composition		SBR Rubber	
Slip Resistance	DIN 51097	Group C (24o): High slip resistance in wet conditions	
Fire class	EN 13501-1	E _{fl} -S1 : moderate flammability	
Packaging		packaging per tile (16 connectors per m ² are provided free of charge)	

SBR rubber colors

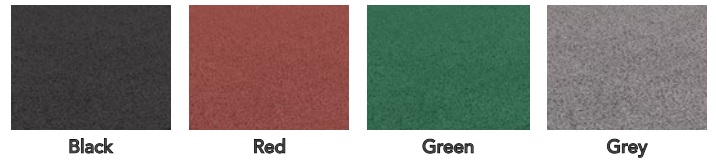

Black


Red

Green

Grey



Green

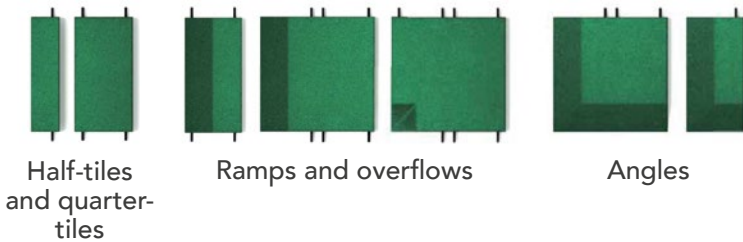

Half-tiles and quarter-tiles

Ramps and overflows

Angles