

# MODULE *DECOR* HIDDEN 8mm HIDDEN INTERLOCKING TILES




**TECHNICAL FLOORING,  
NO GLUE REQUIRED,  
COMPATIBLE WITH  
ALL SUBSTRATES, FOR  
INTENSIVE USE**

**Hidden joints : limits water  
ingress and effectively protects  
the subfloor against moisture.**

**Savings on preparation and  
materials: can be applied  
directly to tile, cracked or damp  
surfaces without the need for  
leveling compound or primer\*.**

No need to close your store:  
quick floating installation without  
interrupting business, no glue  
required.

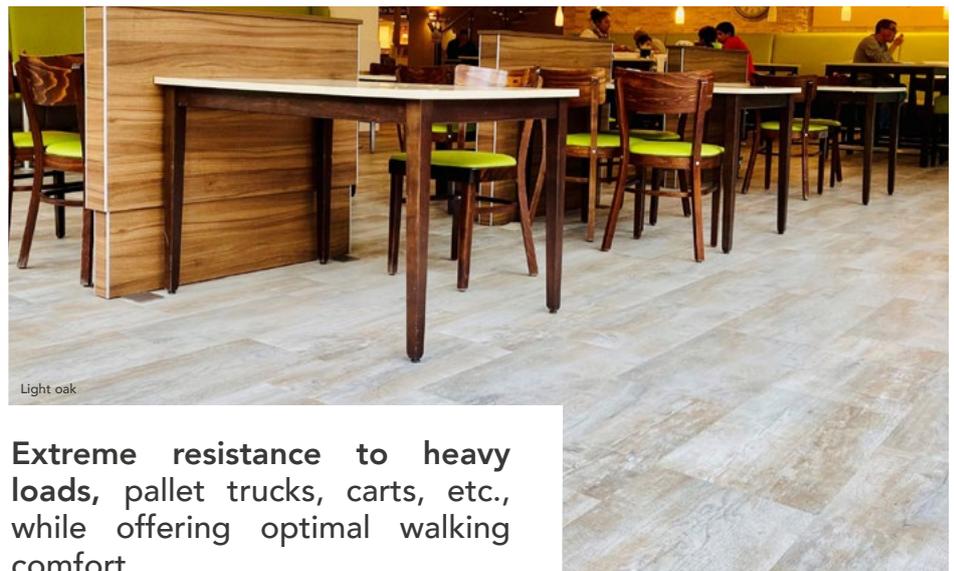

**Extreme resistance to heavy  
loads, pallet trucks, carts, etc.,  
while offering optimal walking  
comfort.**




A preliminary diagnosis is mandatory and will determine whether preparation of the surface is necessary | photos are not contractually binding




Description	Module Decor Hidden 8
Article code	MDECHID8
Thickness	8,2 mm
Wear layer	0,70mm
Interlocking system *	Trapezoidal dovetail hidden joint
Maximum resistance **	Pallet truck up to 1 ton (electric or manual)
Finish (draining structure on the back)	PU Mat
Dimensions (mm) *	Tiles 610 x 610 mm Planks 610 x 305 mm
Weight / m <sup>2</sup>	11,5 kg
Packaging	to the slab
Service rules Average time observed after order confirmation	Delivery within 15 business days. Contact us for orders over 100 m <sup>2</sup> .

Technical datasheet	Norms	Module Decor Hidden 8
Castor wheel	EN 425	No damage
Indentation	EN 433	< 0,10 mm
Fire class	EN 13501-1	Bfl-S1 : very good fire resistance
Electrical resistance	EN 1815	< 2kV
Slip resistance (Europe)	EN13893	Anti-slip DS
Slip resistance (Germany)	DIN 51130	R10
Lightfastness	EN 20105	> 6
Underfloor heating	ISO 8302	Compatible
Sound absorption	ISO 140-8	16 Db
European classification	ISO 10582 :2010	

\* A gap between tiles (up to 1 mm) may occur depending on temperature variations and certain conditions of use: heavy traffic, large areas without expansion joints, or uneven surfaces requiring prior preparation. \*\* Maximum resistance is indicative and not contractual. Each environment requires a free assessment by us, and tile bonding may be recommended. Bonding is mandatory in case of exposure to sunlight or temperatures <15°C and >25°C. Two-component PU adhesive available on request.

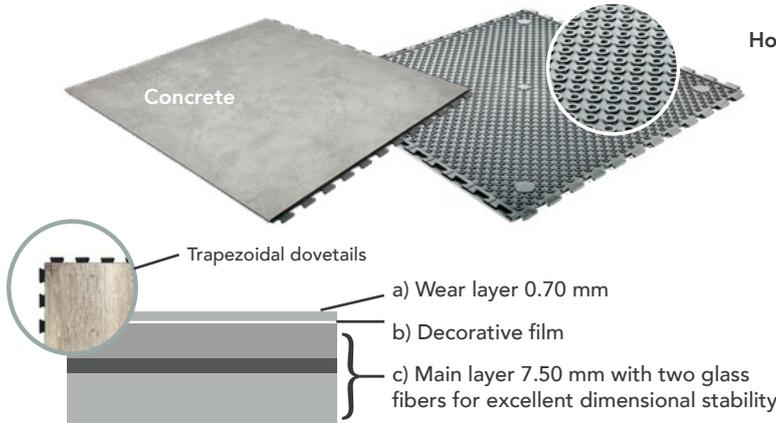

Honeycomb structure to drain water and prevent mold

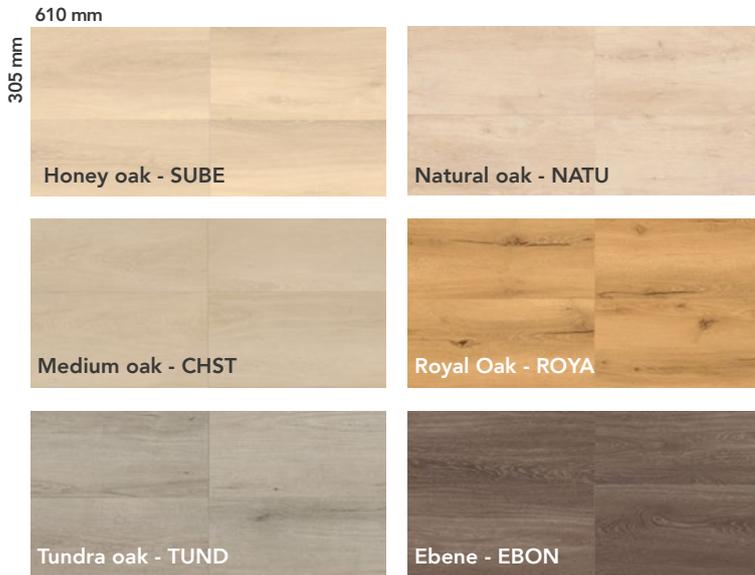

non-contractual photos