

MODULE *SOLID* Hexagon, Paving or Honeycomb



HEAVY DUTY AND MOBILITY FLOORING


Can withstand very heavy loads,
trucks, machines and cars.
Easy to install, remove and transfer.



CAN BE APPLIED ON ALL TYPES
OF SURFACES, EVEN SAND,
GRASS AND ICE.



Heavy duty flooring that
adapts to the subfloor with
no preparation work.

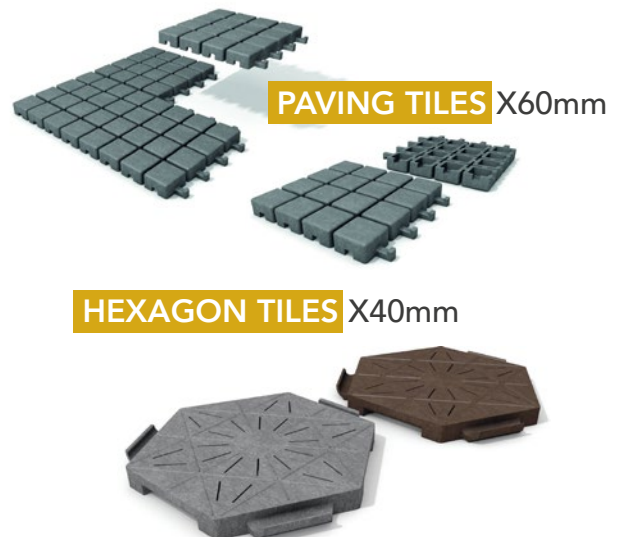

STABILISING AND DRAINING TILES

A ROBUST AND FLEXIBLE FLOOR MADE IN FRANCE FROM 100% RECYCLED PLASTIC



Technical datasheet	Norms	Hexagon tiles X40 Recycled	Paving tiles X60 Recycled	Honeycomb tiles X50 Recycled
Thickness	EN 4282	40mm	60mm	50mm
Dimensions (mm)	EN 426	460 x 460mm (7 tiles = 1.03m ²)	500 x 500mm	500 x 400mm
Article code		MSOL40RE	MSOL60	MSOL40NA
Weight / m ²	EN 430	11.9kg/m ² (1.7 kg /tile)	8.35 kg/tile	10.5kg/m ² (2.1 kg/tile)
Maximum resistance *		5,000 kg /m ²	Load class : SLW 60	up to 26t/m ² on stabilised ground up to 22t./m ² on smooth ground
Thermal resistance		-30°C / +60°C	-30°C / +60°C	-30°C / +60°C
Fire class	EN 13501-1	E _{fl} -S1	E _{fl} -S1	E _{fl} -S1
Colours available		Grey or brown	Grey	Black
Packaging		235 tiles (33 m ²) per pallet	60 tiles (15 m ²) per pallet	100 tiles (20 m ²) per pallet

* Maximum resistance is indicative and not contractual.
Due to the recycling process, differences in colour and texture may occur and are to be expected, small white spots may appear. Dimensional variations (+/-3%) are also possible.